



# Installation Guide

Picture 1

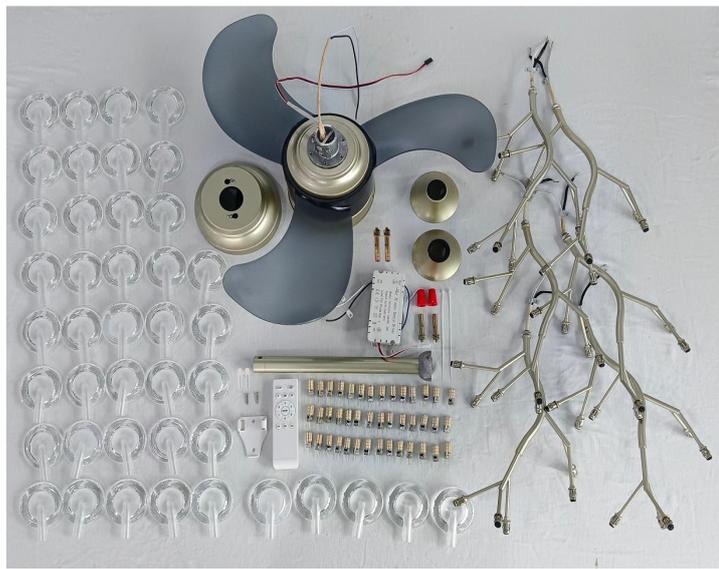


**Parts List:** 4 expansion screws M6\*45mm, 2 self-tapping screws+Plastic sleeve M3\*25mm, Lampshade\*42, light source\*42, cable ties\*2, wire cap\*2, lamp arm\*6

Picture 2

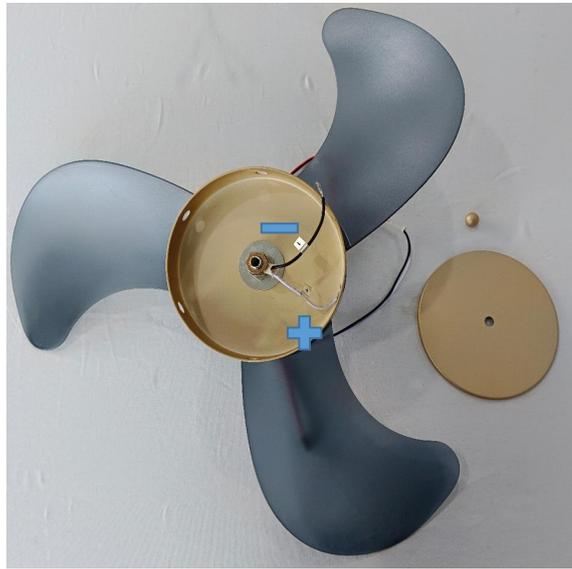


**Step 1:** unscrew the round piece to reveal the line inside, the white wire for the positive pole, the black wire for the negative pole.

Picture 3

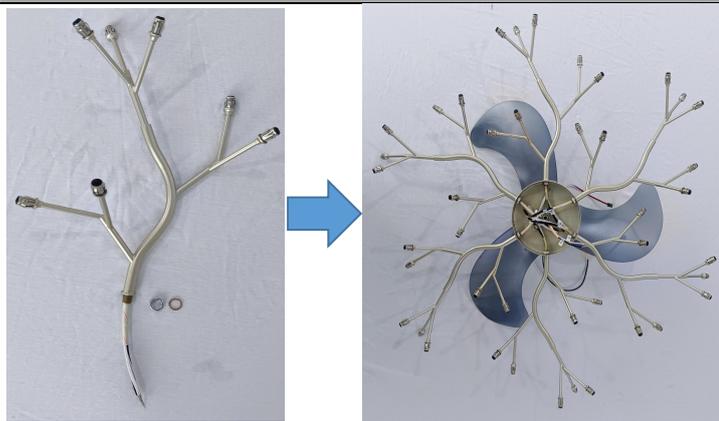


**Step 2:** as shown in the picture screwed.

Picture 4

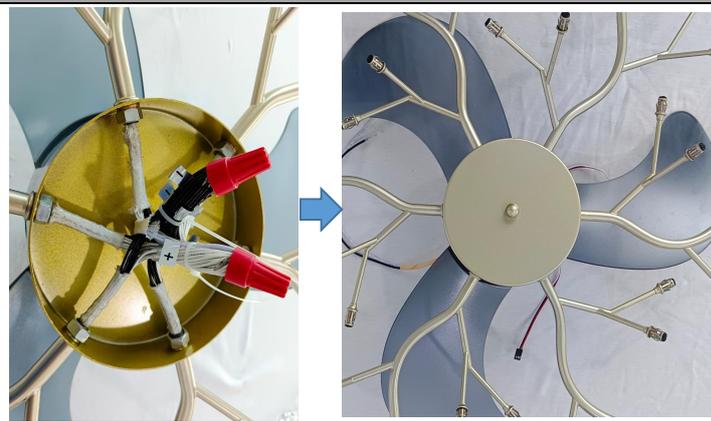


**Step 3:** as shown in the picture wiring, tied with a cable tie and screwed on the wire cap, and screw the round piece back (black to black, white to white).

Picture 5

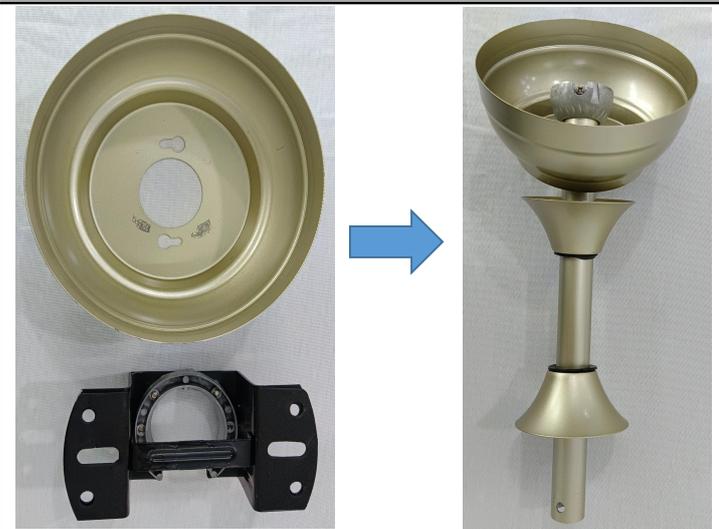


**Step 4:** as shown in the picture to separate the ceiling plate and hanging plate, and the ceiling plate and two speakers into the light pole.

Picture 6

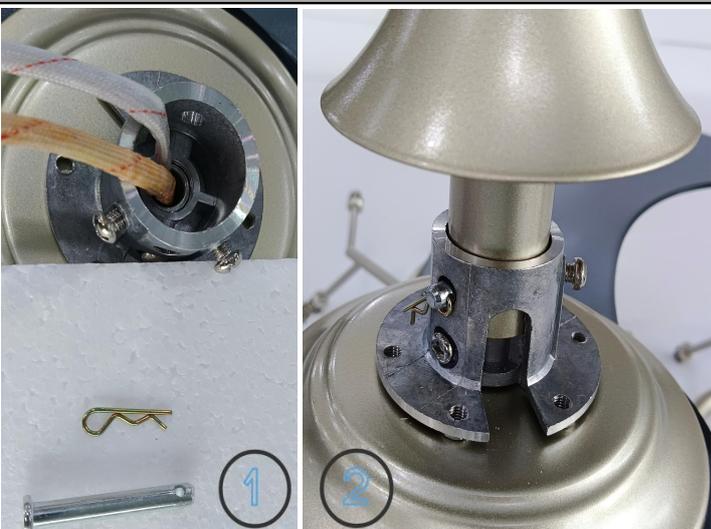


**Step 5:** as shown in the picture, take out the safety pins, put the light pole into the light body to wear the safety pins and tighten the screws to fix.

Picture 7

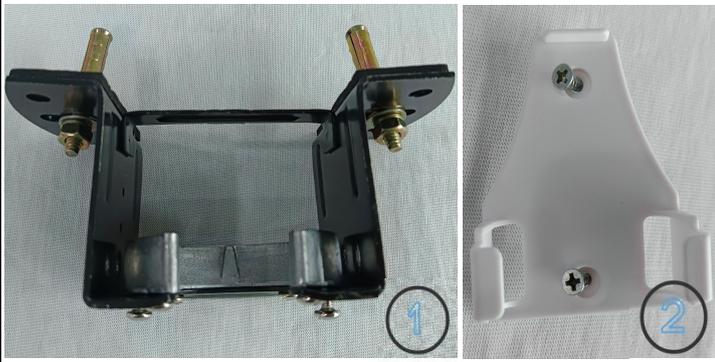


Step 6:use expansion screws to fix the pegboard on the ceiling, with self-tapping screws to fix the remote control base in own convenient location (can not be installed).

Picture 8

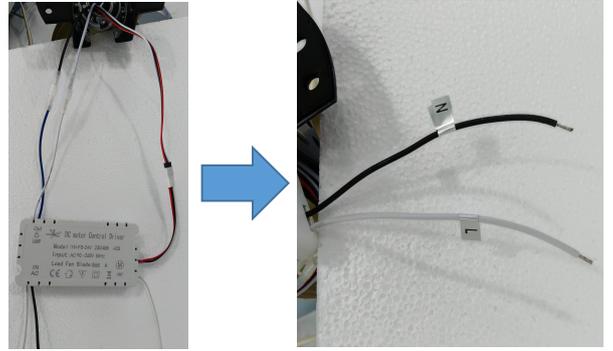

Step 7:as shown in the picture wiring (black and white wire access to the power cord) .

Picture 9

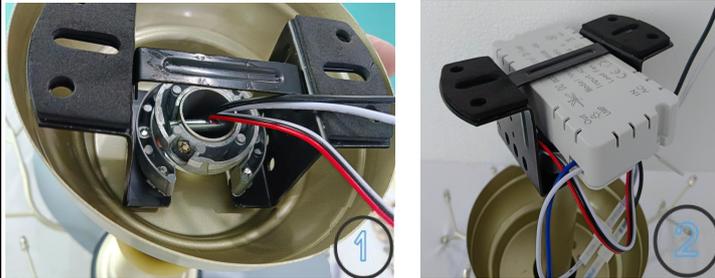


Step 8:snap the light body into the pegboard and put the driver into the pegboard slot.

Picture 10



Step 9:as shown in the picture to the ceiling plate card into the hanging plate screws and then tighten the screws to fix the ceiling plate, and push the speaker to the ends of the light pole.

Picture 11

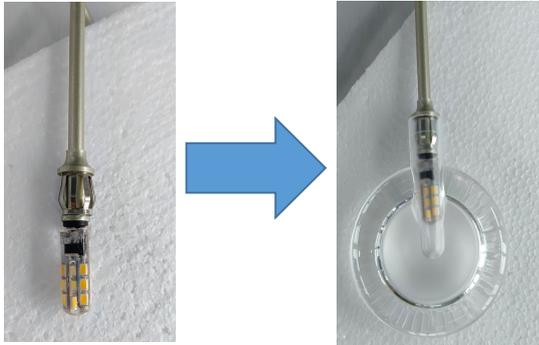

Step 10:as shown in the picture to Access the light source and lampshade.

Picture 12



Completion.